


Maintenance

ALWAYS unplug the unit before cleaning. The outside of the unit can be cleaned with a moist paper towel. A small vacuum attachment or compressed air can be used to vacuum the dust that may accumulate in the vents of the unit.

A Special Cleaning Tool to clean the elements has been included with your unit. They can be used to push any dirt out of the elements. The ozone generator should also be set to its highest level for 30 minutes to burn off any accumulated dirt buildup.

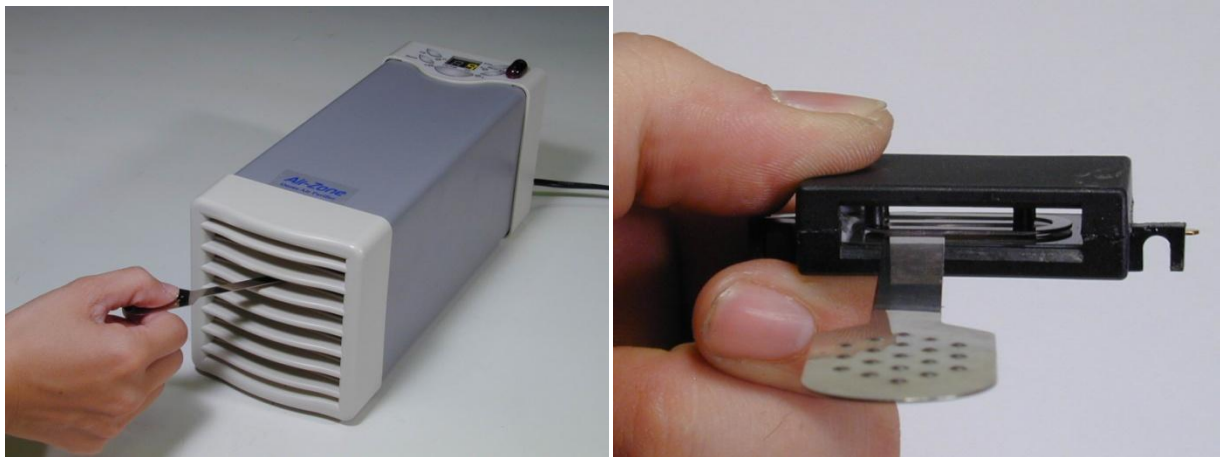

Another cleaning option is to remove the ozone elements (be careful not to snap or damage the wire connectors) and soak them in a warm water/Dawn dish detergent mix. Only a small amount of Dawn is needed. Let the elements soak for an 10-20 minutes and then rinse in warm water. Then let them air dry on a towel overnight.

There is a small electrostatic 3M "Filtrete" air filter pad on the backside of the generator to keep dust from entering the unit. Do not reuse the old filters.